



TECHNICAL DATA

PROBLEM-SOLVER® WOOD STRIPPER #8004

DESCRIPTION

Recommended Uses:

Cabot Problem-Solver Wood Stripper is specially formulated to remove oil-based finishes from all wood surfaces such as cedar, redwood, pine, cypress, fir and pressure-treated wood. It is a biodegradable product which requires neutralization with Cabot Problem-Solver Wood Brightener #8003. It is ideal for use on wood decks, siding, fences, railings, steps and outdoor furniture.

Composition:

Contains sodium hydroxide.

Appearance:

A clear, green liquid.

Coverage:

One gallon of Cabot Problem-Solver Wood Stripper will strip approximately 150-200 square feet of weathered oil finish. These rates may vary.

Packaging/Containers:

Cabot Problem-Solver Wood Stripper is available in one-gallon containers and is packaged with one quart of Problem-Solver Wood Brightener.

Restrictions:

Never mix or use with other chemicals, detergents, cleaners or with Problem-Solver Wood Brightener. Keep containers closed when not in use. Keep away from children. Protect screens, siding, windows and any metal flashing that are not intended to be stripped. Do not apply to hot or wet surfaces. **Do not dilute with water.**

TECHNICAL DATA

Environmental Impact:

This product is biodegradable. Protect any nearby plants, shrubs or other vegetation by wetting them down with water and covering them with plastic before application. Hose off shrubs and grass when job is complete.

Cleanup and Disposal: Rinse out container and application equipment thoroughly with water. Do not reuse container. Dispose of in accordance with local, state and federal regulations. Material Safety Data Sheet (MSDS) available upon request.

Physical and Chemical Data:

Weight: 8.70 pounds per gallon.

Flash Point: None. This product is not flammable.

Solubility: Readily dissolves in water.


Freezing Point: 12°F (-10°C).

% Solids (weight): 8.6

% Solids (volume): 4.5

Solvent Type: Water

Product Type: Oil-based paint, stain and varnish stripper.

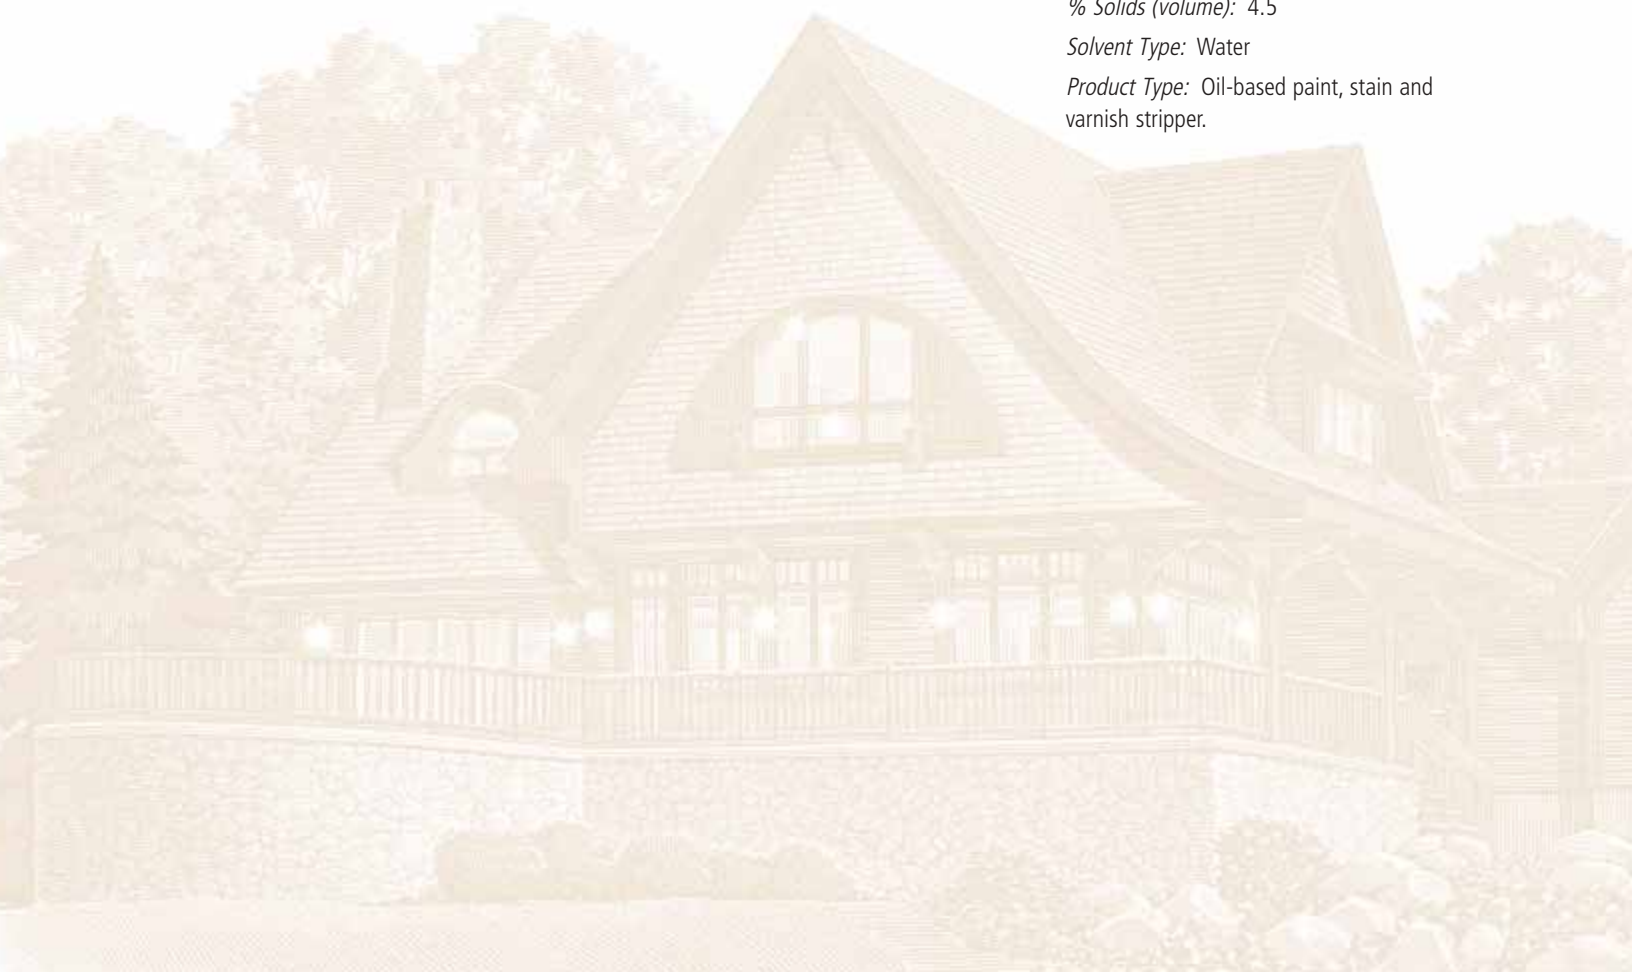

PROBLEM-SOLVER® WOOD STRIPPER #8004

APPLICATION

Surface Preparation and Application:

Because it is difficult to determine the condition of the oil-based coating to be stripped, test the undiluted stripper on a small area to determine its effectiveness. Use Cabot Problem-Solver Stripper #8005 to remove latex paints, stains and finishes. Cabot Problem-Solver Wood Stripper is an oil-based paint, stain and varnish remover. It will remove paint or stain on adjacent surfaces not intended to be stripped. Apply liberally and evenly on a dry, cool surface using a brush, roller or pump-type sprayer. Let stand for a minimum of 15 minutes. Do not allow the stripper to dry. If it begins to dry, lightly mist with a garden hose. Rinse thoroughly with a garden hose with the nozzle at maximum pressure or use a pressure-washing unit. Do not exceed 1000 psi (pounds per square inch).

IMPORTANT: All surfaces must be thoroughly neutralized with Cabot Problem-Solver Wood Brightener #8003, rinsed and dried a minimum of 2 days prior to recoating, depending on the temperature and humidity. Any stripper not rinsed and neutralized from the surface will cause coating adhesion problems. Caution: Red cedar, redwood and mahogany will darken after the use of the stripper. The use of Cabot Problem-Solver Wood Brightener #8003 immediately or within one day after stripping will brighten the wood back to its original color.

Precautions:

When applying and rinsing Cabot Problem-Solver Wood Stripper, walking surfaces, ladders and scaffolding may become slippery. Rinse all such surfaces thoroughly to remove overspray. **Use wrap-around goggles with side shields, rubber gloves and protective footwear for protection from harmful chemicals. Remove any contaminated clothing immediately.**

Store at temperatures between 50°F (10°C) and 85°F (30°C). Keep from freezing. Use only when temperatures are between 50°F (10°C) and 90°F (32°C).

AVAILABILITY

Cabot Wood Care Products are sold throughout the United States and Canada. For a list of Cabot dealer locations, please contact Cabot's Technical Services & Support at 1-800-US-STAIN.

WARRANTY

If this product does not perform as stated on the label after you apply it according to label directions, Cabot will either replace this product or refund its purchase price, at its option. Cabot disclaims all other implied or expressed warranties. Cabot will not provide or pay for labor for removal or application of the product. This warranty excludes all incidental or consequential damages. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

MAINTENANCE


Cabot Problem-Solver Wood Stripper must be neutralized with Cabot Problem-Solver Wood Brightener.

TECHNICAL SERVICES

For additional technical information, product line color cards, fan decks and liquid product samples, see your specialized Cabot Dealer or call the Cabot Wood Care Specialists in Technical Services & Support toll-free at 1-800-US-STAIN (877-8246).

FILING SYSTEMS

For complete model specifications and technical data on all Cabot products, visit the Cabot Home Page at: cabotstain.com.



Cabot®
Newburyport, MA 01950
Tel.: 800-US-STAIN
Fax: 1-800-998-3299
cabotstain.com